



Antelco® Mini Bubbler

Gentle umbrella pattern.
Flow and coverage can be altered by rotating the cap.

Applications

Street trees and shrubs. Flow rates allow for short watering times.

Features

- Finger-tip flow control with shut-off option.
- Spike model to anchor Mini Bubbler at the plant.
- Barb model for direct attachment to feeder and supply lines.
- Threaded model for installation into Rigid Risers and Asta® Stakes.
- 1/2" Threaded model for riser pipe installations.



Mini Bubbler Barb 4mm



Mini Bubbler Thread 1/2"




Mini Bubbler Thread 4mm




Mini Bubbler Spike 4mm

Flow Rate

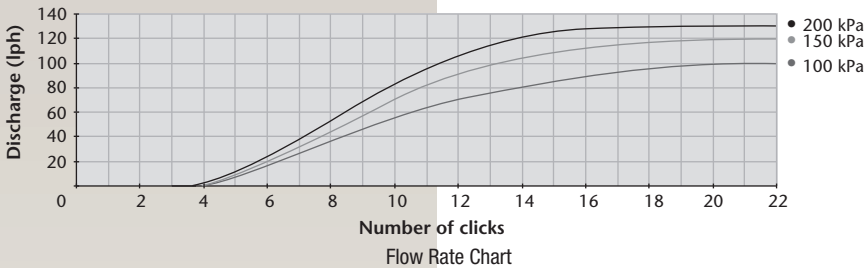

Diameter of Throw

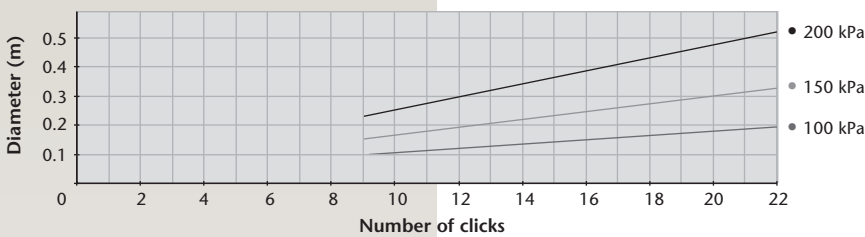

Mini Bubbler 360°				
Base Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Barb 4mm	10131745	100	65	11.0
Thread 4mm	10131715	100	65	13.8
Thread 1/2" FNTP	10131725	25	70	8.2
Spike	10131795	25	40	6.3

Performance		360°	
	Pressure (kPa)	Flow (lph)	Diameter (m)
full open (approx. 22 clicks)	100	100	0.2
	150	119	0.3
	200	130	0.5

Specifications: Shrubber® and Mini Bubbler						
Dimensions Assembled		Barb	Thread	Taper	Thread 1/2"	Spike
Height		23mm	23mm	23mm	34mm	135mm
Width		20mm	20mm	20mm	26mm	42mm
Depth		16mm	16mm	16mm	26mm	16mm
Weight (approx)		1.6g	2.0g	2.1g	4.3g	5.4g
UV Stabilised Material	Base Cap	Polypropylene Polypropylene	Acetal Polypropylene	Acetal Polypropylene	Polypropylene Polypropylene	Polypropylene Polypropylene
Base/Connection Type: Inlet		Barb 4mm	10-32 UNF Thread 4mm	Taper #6	Thread 1/2" FNTP	Barb 4mm