


Features

- External strainer.
- Available with combination thread or barb.
- Spring loaded.
- Materials:
Body, and strainer: Polypropylene
Seals: Nitrile rubber with stainless steel backing disc and spring.
- For use on small pumping systems where an inexpensive plastic foot/strainer valve is required.

Specifications

- Outlet: 20/25/32 mm MBSP or 25/32 mm barb.
- Slot dimensions: 4.4mm x 2.3mm
- Length: 174 mm

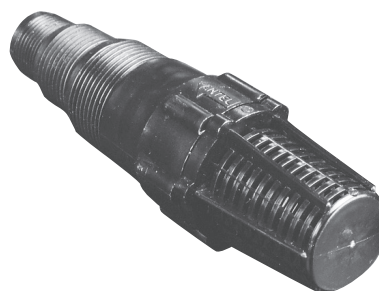

Ordering Information


Code	Description
1012870	Plastic 20/25/32 mm MBSP Combination Thread
1012871	Plastic 25/32 mm Barbed Combination Hose Tails

Features

- Air Strainer. Weighted stainless steel vent disc.
- Installation downstream of control valve assemblies for releasing air and preventing vacuums on system shut-down.
- Available with 3 in 1 threaded combination.
- Materials:
Body and strainer: Polypropylene
Seals: Nitrile rubber with stainless steel backing disc.

Specifications

- Outlet: 20/25/32 mm MBSP.
- Pressure rating: 400 kPa.
- Length: 174 mm

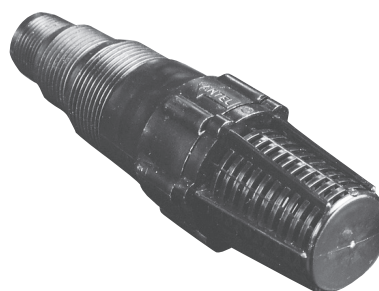

Ordering Information

Code	Description
1012879	20/25/32 mm Air Relief Valve