


600 Series Head Loss Graph (per tank)

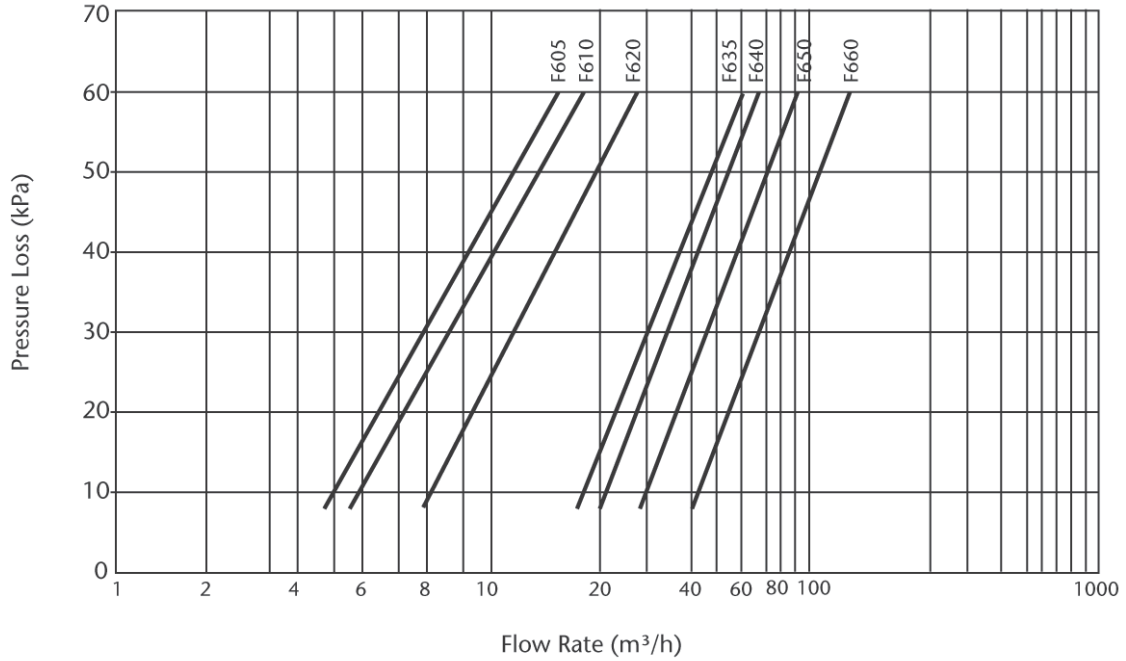

Flow Rate Data						
Model	Diameter		Backwash Flow (based on 80m/h or 22 L/s/m ²)		Flow Range per Tank (based on 45-65m/h or 12.5-18 L/s/m ²)	
			L/s	m ³ /h	L/s	m ³ /h
	mm	inch				
F605	300	12	1.4	5	0.9-1.3	3-5
F610	400	16	2.8	10	1.7-2.2	6-8
F620	500	20	4.4	16	2.5-4.1	9-15
F635	635	25	6.7	24	4.1-5.5	15-20
F640	760	30	9.7	35	5.5-8.3	20-30
F650	900	36	13.9	50	8.3-11.1	30-40
F660	1220	48	25	90	13.8-20.8	50-75

Flow range figures are given to show the normal anticipated flow range for each tank. The number of tanks required for any particular flow rate will depend on the particulate load and the finish required.