


Basket Strainers

An inexpensive secondary “trap” to be used downstream of the principal filter station

Features

- Supplied with either victaulic or flanged (table D) inlet and outlets
- Max. operating pressure: 700 kPa
- 80 mesh standard screen
- Type 304 stainless steel housing and basket
- Cost efficient system protection
- High flow with low pressure drop safety strainer

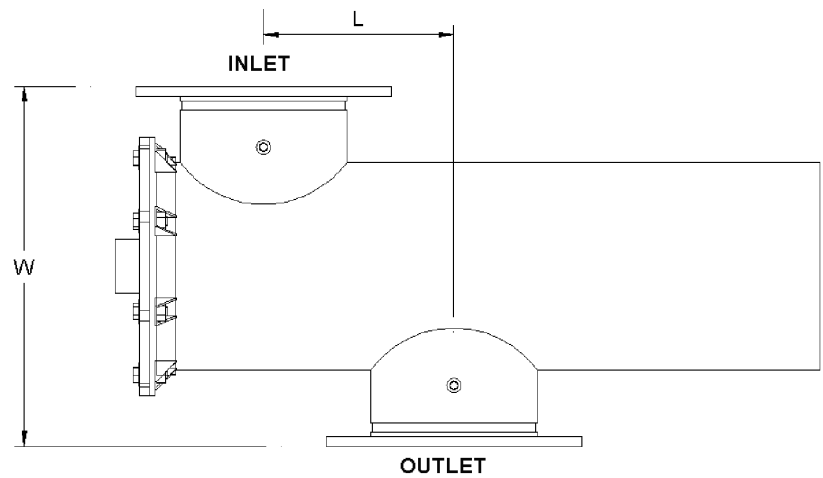

Technical Specifications							
Model	Inlet Outlet (mm)	Max Flow* (m³/h)	Max Pressure (kPa)	Length (mm)	L (mm)	W (mm)	Body Diam. (mm)
1014737 1014737F	100Vic 100FI	68	700	400	135	420	215
1014738F	150FI	204	700	760	201	476	270
1014733 1014733F	200Vic 200FI	270	700	905	250	474	270
1014739F	250FI	390	700	1060	380	530	325
1014740	300Vic	540	700	1250	410	550	350

* Based on 10 kPa pressure loss (clean). Derate for dirty water.