

TORO

PERROT ROLLCART TRAVELLING IRRIGATOR



The Perrot RollcarT is a travelling sprinkler that is ideal for watering large turf areas. Capable of achieving a throw of up to 18 m in radius, the RollcarT can be used in larger turf areas, parks and sports grounds. The RollcarT starts travelling as soon as the water supply is turned on. The RollcarT is drawn toward a guide rope and turns off automatically at the end of its run.

FEATURES & BENEFITS

Multiple Uses

Part circle sprinkler allows the operator to define the area to be irrigated. Can be operated in full or part circle mode.

Variable Speed

Speed can be altered by regulating the water flow. RollcarT will operate between 10 to 20 m/Hr.

Uniform Distribution

ZE impact sprinkler coupled with constant speed delivers uniform water distribution.

Maintenance Free

Gears are sealed and operate at low friction and remain practically maintenance free.

Convenience

Compact self contained design ensures simple set-up and storage.

Lawn Friendly

Part circle sprinkler operation allows the RollcarT to travel on dry ground eliminating potential damage to new seeded lawn.



PERROT ROLLCART TRAVELLING IRRIGATOR

SPECIFICATIONS

Applications: Large lawn areas, sports field

Technical Data:

Nozzle Size: ZE 30 (7 mm)

Operating Pressure: 350 - 600 kPa



Radius Range: 18.3 m

Flow Rate: 54.3 L/Min

Trajectory: 30°

Inlet: 25 mm (1") BSPF

RollcarT Typical Layout

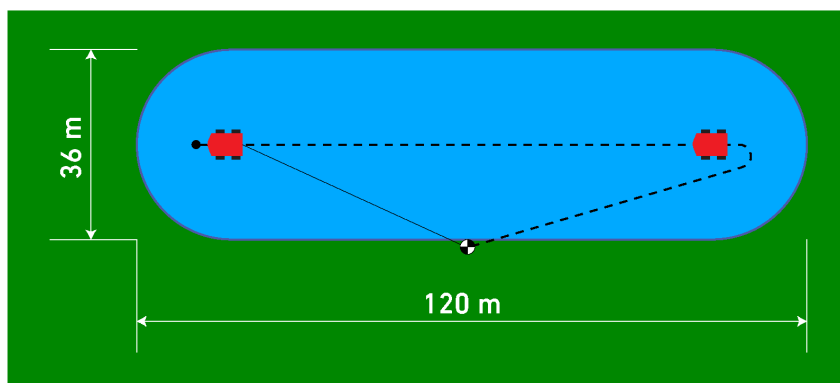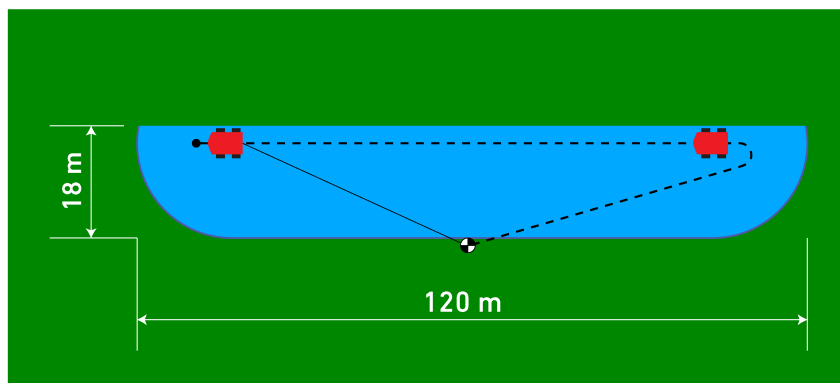

RollcarT Product Details

| Sprinkler Type | Inlet | Operating Pressure | Body Height | Body Length | Body Width | Weight |
|----------------|-----------------|--------------------|-------------|-------------|------------|--------|
| RollcarT | 25 mm (1") BSPF | 350 kPa | 470 mm | 790 mm | 400 mm | 27 Kg |

RollcarT Product Details

| | |
|----------------|---|
| BM84270 | RollcarT Travelling Irrigator - Order Hose Separately |
| 1018001 | 25 mm x 55 m Hose with Fittings (1000 kPa) |
| ZK94007 | GEKA Brass Coupling x 25 mm Hose Tail |
| ZK94011 | GEKA Brass Coupling x 25 mm Male Thread |